

SIGRATHERM® KFA

Material: Carbon soft felt


Application: High-temperature insulation

Material data of SIGRATHERM® KFA

Typical properties	Units	KFA5	KFA10	KFA15
Thickness	mm [in]	6 [1/4]	12 [1/2]	16.5 [5/8]
Area weight	g/m ²	550	1100	1650
Width	mm [in]	1350 [53]	1350 [53]	1350 [53]
Length	m [ft]	25 – 30 [82 – 98]	25 – 30 [82 – 98]	25 – 30 [82 – 98]
Ash content	%	< 1.7	< 1.7	< 1.7
Max. application temperature	°C [°F]	1000 [1800] in vacuum or inert gas	1000 [1800] in vacuum or inert gas	1000 [1800] in vacuum or inert gas

Values without tolerance represent typical average values. For any engineering/design purposes please always contact our technical sales team.

Thermal conductivity of SIGRATHERM KFA as a function of temperature [inert gas atmosphere]

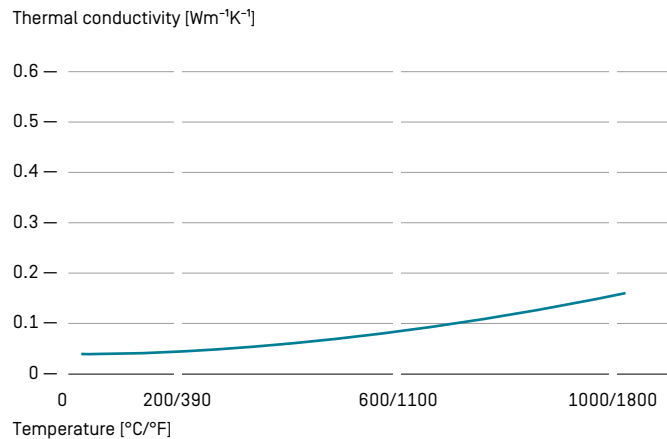

Graphite Solutions | SGL CARBON GmbH
 Sales Europe/Middle East/Africa | felt-europe@sglcarbon.com
 Sales Americas | felt-americas@sglcarbon.com
 Sales Asia/Pacific | felt-asia@sglcarbon.com
 www.cfrc-and-felts.com | www.sglcarbon.com

TDS KFA.00

07 2021/0 1NÄ Printed in Germany
 ®registered trademarks of SGL Carbon SE

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".