


SIGRASEAL®

Flexible graphite foil reinforced with
tanged stainless steel

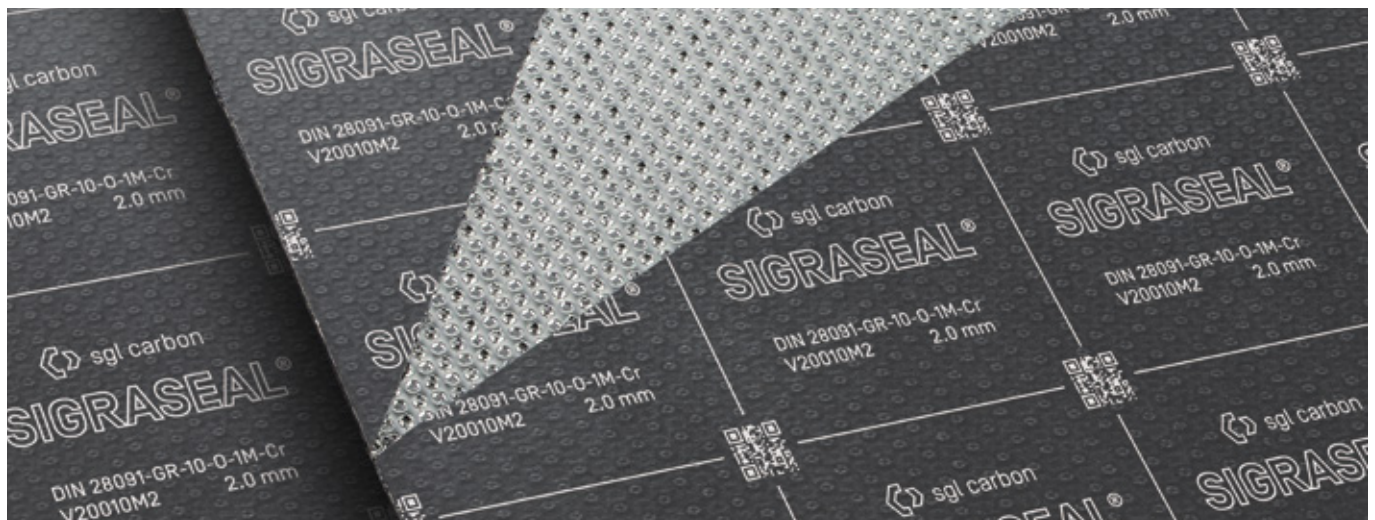

SIGRASEAL is an adhesive-free gasket sheet made of flexible graphite foils reinforced with tanged stainless steel.

Applications

- For all common pipework and vessel flange designs
- For one-piece gasket designs up to an outside diameter of 1500 mm; for diameters above 1500 mm, for example two-layer structures with segmented sections and staggered joints are recommended
- For operating pressures from vacuum up to 100 bar
- For corrosive media
- Operating temperatures range from $-250\text{ }^{\circ}\text{C}$ up to $500\text{ }^{\circ}\text{C}$ depending on chemical resistance. Life time might be limited at high temperatures. Consult the manufacturer when application temperatures exceed $400\text{ }^{\circ}\text{C}$. Please refer to our technical guideline regarding thermal stability.
- Gaskets for the chemical, petrochemical and refinery industries
- Steam pipework in power generation plants and heating equipment
- Existing plants

Properties

- High blow-out resistance and mechanical strength
- High fault tolerance during assembly and operation
- Good chemical resistance
- Long-term stability of compressibility and recovery, even under fluctuating temperatures
- No measurable cold or warm flow characteristics up to the maximum permissible gasket stress
- No aging or embrittlement (no adhesives or binders)
- Asbestos-free (no associated health risks)

Approvals/Test reports

Please see www.sigraflex.com/downloads for details

- BAM oxygen
- FDA and LFGB (SGS Institut Fresenius)

Assembly instructions

Our detailed assembly instructions are available on request.



↑ Cross-section

Material data of SIGRASEAL®

Typical properties		Units	V10010M2	V15010M2	V20010M2	V30010M2	
Thickness		mm	1.0	1.5	2.0	3.0	
Dimensions		m	1.5 x 1.5	1.5 x 1.5	1.5 x 1.5	1.5 x 1.5	
Bulk density of graphite		g/cm ³	1.0	1.0	1.0	1.0	
Ash content of graphite [DIN 51903]		%	≤ 2.0	≤ 2.0	≤ 2.0	≤ 2.0	
Purity		%	≥ 98	≥ 98	≥ 98	≥ 98	
Total chloride content		ppm	≤ 50	≤ 50	≤ 50	≤ 50	
Total halogen content		ppm	≤ 200	≤ 200	≤ 200	≤ 200	
Oxidation rate in air at 670 °C [TGA]		%/h	< 4	< 4	< 4	< 4	
Oxidation inhibitor			yes	yes	yes	yes	
Passive corrosion inhibitor [ASTM F 2168-13]			yes	yes	yes	yes	
Reinforcing steel sheet details			Tanged stainless steel sheet				
	ASTM material number		316L	316L	316L	316L	
	Thickness	mm	0.1	0.1	0.1	0.1	
	Number of sheets		1	1	1	1	
Residual stress [DIN 52913]	$\sigma_{D16h, 300^\circ C, 50 N/mm^2}$	N/mm ²	≥ 45	≥ 45	≥ 45	≥ 45	
Gasket factors [DIN E 2505 / DIN 28090-1]							
Gasket width	$b_D = 20 \text{ mm}$	σ_{VU}	N/mm ²	20	20	20	20
			m	1.3	1.3	1.3	1.3
		σ_{V0}	N/mm ²	200	180	160	120
		$\sigma_{B0 \text{ at } 300^\circ C}$	N/mm ²	180	160	140	100
Gasket factors [DIN EN 13555]			see www.esadata.org or www.gasketdata.org				
Compression factors [DIN 28090-2]							
Compressibility	ϵ_{KSW}	%	35	40	40	40	
Recovery at 20 °C	ϵ_{KRW}	%	4	4	4	4	
Hot creep	ϵ_{WSW}	%	< 4	< 4	< 4	< 4	
Recovery at 300 °C	ϵ_{WRW}	%	4	4	4	4	
Young's modulus at 20 N/mm ² [DIN 28090-1]		N/mm ²	850	850	850	850	
ASTM	„m“-factor		2.5	2.5	2.5	2.5	
	„y“-factor	psi	3000	3000	3000	3000	
Compressibility [ASTM F36]		%	37	42	42	42	
Recovery [ASTM F36]		%	15	14	14	14	
The gasket factor conversion formulas as per AD Merkblatt B7 are as follows			$K_0 \times K_D = \sigma_{VU} \times b_D$ $K_1 = m \times b_D$				
Definitions							
σ_{VU}	Minimum gasket assembly stress. Recommended gasket assembly stress: $\geq 20 \text{ N/mm}^2$ bis σ_{B0}		ϵ_{KSW}	Compression set under a gasket stress of 35 N/mm^2			
σ_{BU}	Minimum gasket assembly stress in service, where σ_{BU} is the product of internal pressure p_i and gasket factor m for test and in service ($\sigma_{BU} = p_i \times m$)		ϵ_{KRW}	Gasket recovery after reduction in gasket stress from 35 N/mm^2 to 1 N/mm^2			
σ_{V0}	Maximum permissible gasket stress at 20 °C		ϵ_{WSW}	Gasket creep compression under a gasket stress of 50 N/mm^2 at 300 °C after 16 h			
$\sigma_{B0 \text{ at } 300^\circ C}$	Maximum permissible gasket stress in service		ϵ_{WRW}	Recovery after reduction in gasket stress from 50 N/mm^2 to 1 N/mm^2			
m	$m = \sigma_{BU} / p_i$		The percentage changes in thickness of ϵ_{KSW} , ϵ_{KRW} , ϵ_{WSW} und ϵ_{WRW} are relative to the initial thickness.				
„m“-factor	Similar to m , but defined acc. to ASTM, hence different value		Unless stated otherwise, all values are valid at room temperature, typical, non-binding and subject to change. Please note some values correspond to the graphite foil only. For engineering or design purposes please contact our technical sales team.				
„y“-factor	Minimum gasket stress in psi						
K_0	in mm, factor for gasket assembly stress						
K_1	in mm, factor for gasket stress in service						



Additional information on our SIGRAFLEX sealing materials can be found under "Download Center" on our homepage. www.sigraflex.com/downloads



Graphite Materials & Systems | SGL CARBON GmbH | SGL Technic LLC
 Sales Europe/Middle East/Africa | sigraflex-europe@sglcarbon.com
 Sales Americas | sigraflex-americas@sglcarbon.com
 Sales Asia/Pacific | sigraflex-asia@sglcarbon.com
www.sigraflex.com | www.sglcarbon.com

TDS SIGRASEAL_Sheet.01

11 2020/0 1NÄ Printed in Germany
 ®registered trademarks of SGL Carbon SE

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".