

SIGRATHERM® GFD


Material: Graphite soft felt

Application: High-temperature insulation for highly corrosive environments

Material data of SIGRATHERM® GFD

Typical properties	Units	GFD12
Thickness	mm (in)	12 (1/2)
Area weight	g/m ²	850
Width (max.)	mm (in)	1270 (50)
Length	mm (ft)	25 – 30 (82– 98)
Ash content	ppm	< 500
Ash content (purified grade)	ppm	< 20
Max. application temperature	°C (°F)	2000 (3600) in vacuum or inert gas

Thermal conductivity of SIGRATHERM GFD as a function of temperature (inert gas atmosphere)

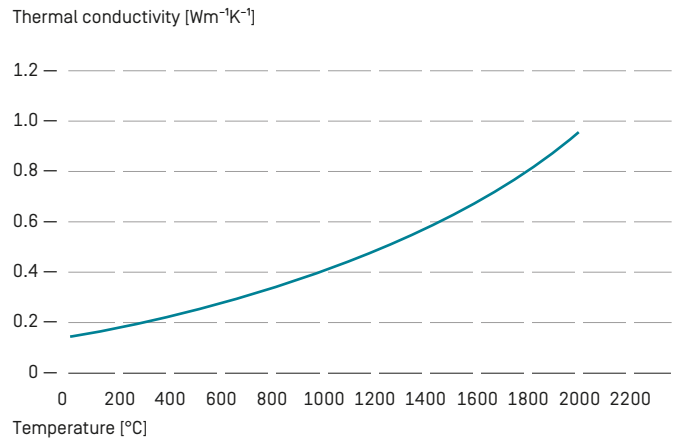

Graphite Materials & Systems | SGL CARBON GmbH
 Sales Europe/Middle East/Africa | cfrc-europe@sglcarbon.com
 Sales Americas | cfrc-americas@sglcarbon.com
 Sales Asia/Pacific | cfrc-asia@sglcarbon.com
 www.cfrc-and-felts.com | www.sglcarbon.com

TDS GFD.00

09 2018/1.0 E Printed in Germany
 ®registered trademarks of SGL Carbon SE

This information is based on our present state of knowledge and is intended to provide general notes on our products and their uses. It should therefore not be construed as guaranteeing specific properties of the products described or their suitability for a particular application. Any existing industrial property rights must be observed. The quality of our products is guaranteed under our "General Conditions of Sale".